

50020 Series Bronze Flexible Impeller Pump

Features

- Self prime from dry up to 1.5 metres
- Flows up to 18 litres per minute
- Pressure up to 1.7 bar
- Will handle hard or soft solids
- Will tolerate abrasive wear
- Non pulsating flow
- Will handle viscosities up to 500 centiPoise
- Uses standard IEC motor



Typical Applications

- **Industrial** : Industrial filling systems, Utility shop pump, Transfer systems, Recharge water softeners, Sump emptying, Cooling tower circulation, Line cleaning, Heat exchangers, Air scrubbers, Processing systems, Laboratory circulation and Oil changing
- **Plumbing** : Emptying clogged drains, Pump out water closets and Empty sumps, sinks & tubs.
- **Contractors** : Cement mixing, Wash down equipment, Empty basements and Fill & empty tanks.
- **Agricultural** : Fill water tanks, Flush animal pens and Pumping water for livestock.
- **Food & Beverage** : Vending machines, Refrigeration condensate pump out, Wash down equipment and Floor cleaning.

Specifications

Seal : Nitrile lip seal

Pump Head : Bronze

End Cover : Brass

Bearings : Uses motor bearings

Shaft : Stainless steel, shaft extension

Ports : ½" BSP internal thread and 25mm (1") bore hose connections

Motor Adaptor : Polypropylene

Weight : 6.4kg

Model Options



Impeller option				Neoprene	Nitrile
Temperature range				4°C to 80°C	0°C to 90°C
Poles	Volts	Amps	RPM		
4	230	2.13	1450	50020-2411	50020-2413
Pump head only				50021-2411	50021-2413

Motors are single phase, 180 Watt, 50 Hertz, AC. Face & Foot mounting B3-B14.

Enclosure IP55, frame size 63 all IEC 72 standard. Fitted with manual reset overload.

Note : it is not recommended to start the pump at extreme ends of the temperature range, impeller damage may occur

For Installation, Operating, Maintenance and Safety Instructions refer to form 43001-0543




Dimensions in mm

Parts List

Key	Description	Qty	Part Number
1	Screw*	3	SP1004-09
2	Endcover*	1	9328-0
3	Gasket*	1	1985-01
4	Body	1	23064-2000
5	Impeller Neoprene*	1	7273-0001
	Impeller Nitrile*	1	7273-0003
6	Lip Seal*	1	SP2701-52
7	Slinger	1	6342
8	Screw - M5 x 12	2	X3001-151F
9	Adaptor	1	50168-0000
10/11	Shaft Extension Kit	1	50167-0000
12	Screw - M5 x 16	4	X3001-153F
13	Washer	4	X3080-081F
14	Motor	1	SP8012-0260
Parts marked * contained in service kit			
Service	Neoprene	1	SK224-02
Kit	Nitrile	1	SK224

Performance

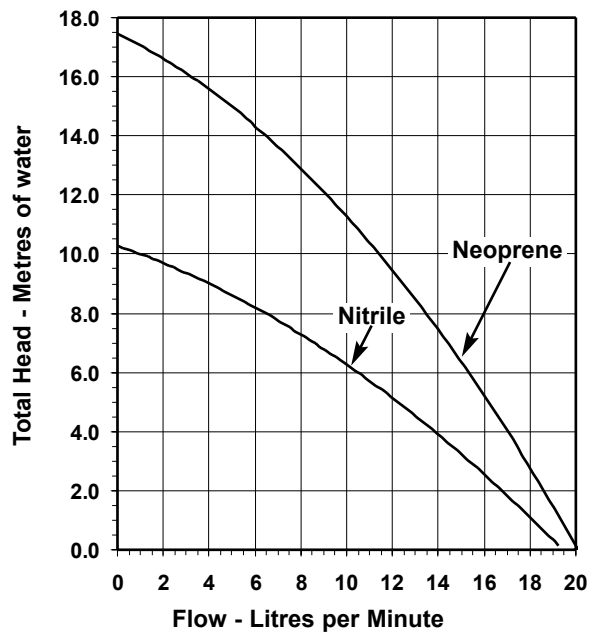

Note : Performance shown is for a new pump, pumping water at 20°C, performance may vary by up to 15%. Consult factory for performance of alternative impeller compounds.

Jabsco



ITT Industries

USA

Jabsco
20 Icon
Foothill Ranch
CA 92610

Tel : +1 949 859 4945
Fax : +1 949 859 1153

UK

Jabsco
Bingley Road
Hoddesdon
Hertfordshire, EN11 0BU

Tel : +44 (0) 1992 450 145
Fax : +44 (0) 1992 467 132

GERMANY

Jabsco GmbH
Oststraße 28
22844 Norderstedt

Tel : +49 (0) 40 53 53 73 0
Fax : +49 (0) 40 53 53 73 11