

# QF1200SU-CV

## Quaternary Diaphragm Pumps

### Single-Use – Biotech/Biopharma

#### Features

- Compact version with integrated controller
- Fully disposable machined polypropylene pump chamber
- Easy replacement
- 4-piston technology
- Gentle product treatment
- No particle generation
- Low pulsation
- Linear flow characteristic
- Self-priming
- Safe dry-run operation
- Elimination of cleaning validation and cross contamination

#### Applications

- Filtration systems (TFF, etc.)
- Chromatography systems
- Feeding pump
- Virus filtration
- Sterile filtration

#### Technical Data

QF1200SU-CV	
<b>Flow Rate Maximum:</b>	
Eccentric Shaft 5°	1200 l/h (317 gph)
<b>Flow Rate Minimum:</b>	
Eccentric Shaft 5°	10 l/h (2.64 gph)
<b>Pressure:</b>	
Temperature of Fluid < 40° C (104° F)	4 bar (58 psi)
Temperature of Fluid > 40° C (104° F)	4 bar (58 psi)
<b>Maximum Temperature:</b>	
Fluid	60° C (140° F)
Autoclave	130° C (260° F)
<b>Pump Speed Range:</b>	
rpm	10 - 2200
<b>Suction Lift Dry at 1800 rpm:</b>	
Eccentric Shaft 5°	4-4.5 m (13.1-14.7 ft)
<b>Volume Specifications:</b>	
Approximated Volume per Revolution at Free Output	9.6 ml
Filling Volume Without Connectors	75 ml



Technical data for the QF1200SU-CV-M (pump chamber made of injection-molded PE) available on request.



QF1200SU-CV	
<b>Connection Specification (Standard):</b>	
Connectors	3/4" TC
Position of Connectors	Inline
Number of Flow Directions	4
<b>Product Wetted Materials (Standard):</b>	
Pump Chamber	PP
Valve Plate	PP
Diaphragms	TPE
Valves	EPDM
O-rings	EPDM
<b>Certificates/Proofs (Optional):</b>	
Elastomere (product wetted)	USP <88> Cl. VI; FDA21CFR177; BSE/TSE Safe; USP 87/381/661
<b>Motor:</b>	
Rated speed	2200 min-1
Voltage	230 V
Power	0.75 kW
<b>Pump Dimension with Motor and Housing:</b>	
Length	497 mm (19.56")
Width	200 mm (7.87")
Height	210 mm (8.27")
<b>Pump Weight with Motor and Housing:</b>	
	21 kg (46 lb.)

## Performance Charts

### Eccentric Shaft: 5°

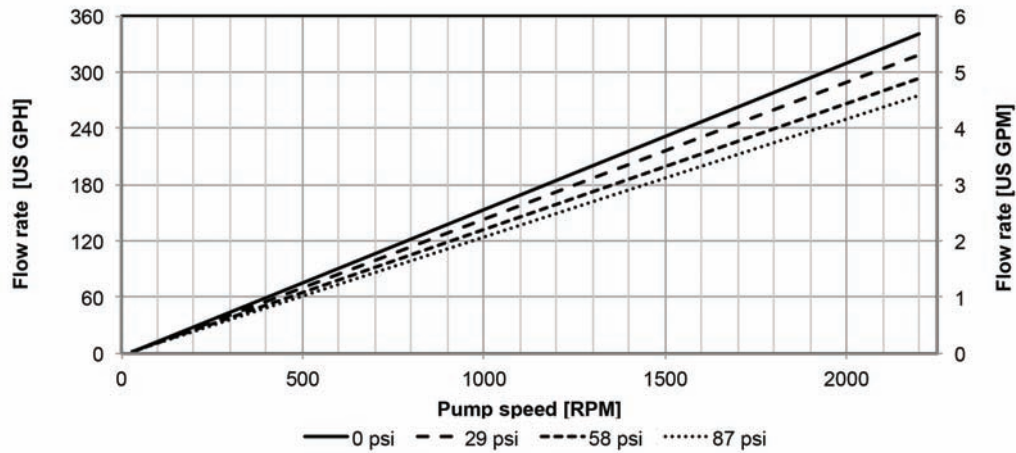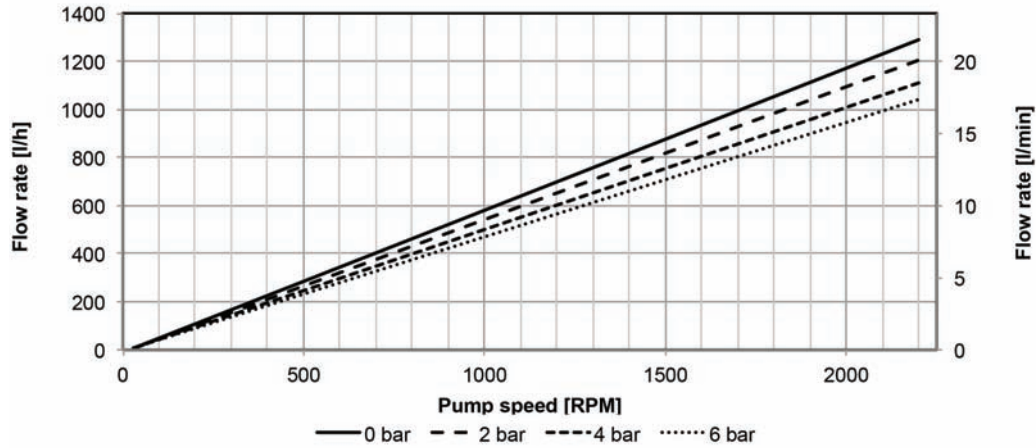

## Accessories

### Diaphragm Sensor

- Sensor installed in ring drive unit
- Detection of all liquids
- Signal output to a controller, if diaphragm is ruptured

Distributed by:

**TECHNIQUES DES FLUIDES**  
 7 rue de la Fosse aux Loups  
 95100 ARGENTEUIL  
 Tel. : 01 34 11 13 73  
 Fax : 01 34 11 96 35  
[www.techniquesfluides.fr](http://www.techniquesfluides.fr)

QF1200SU-CV

© 2015 ALMATEC



PSG Kamp-Lintfort  
 ALMATEC Maschinenbau GmbH  
 Carl-Friedrich-Gauß-Straße 5  
 47475 Kamp-Lintfort - Germany  
 0: +49/2842/961-0, F: +49/2842/961-40  
[quattroflow.com](http://quattroflow.com)  
[info@almatec.de](mailto:info@almatec.de)