

TECHNIQUES DES FLUIDES

10 Rue Jean Poulmarch, bat. 3

Z.I. Du Val d'Argent

95100 Argenteuil


Tel. : 01.34.11.13.73 / Fax : 01.34.11.96.35

E-mail : tdf@techniquesfluides.fr

Site web : www.techniquesfluides.fr



PV400 Stainless Steel/Alloy C

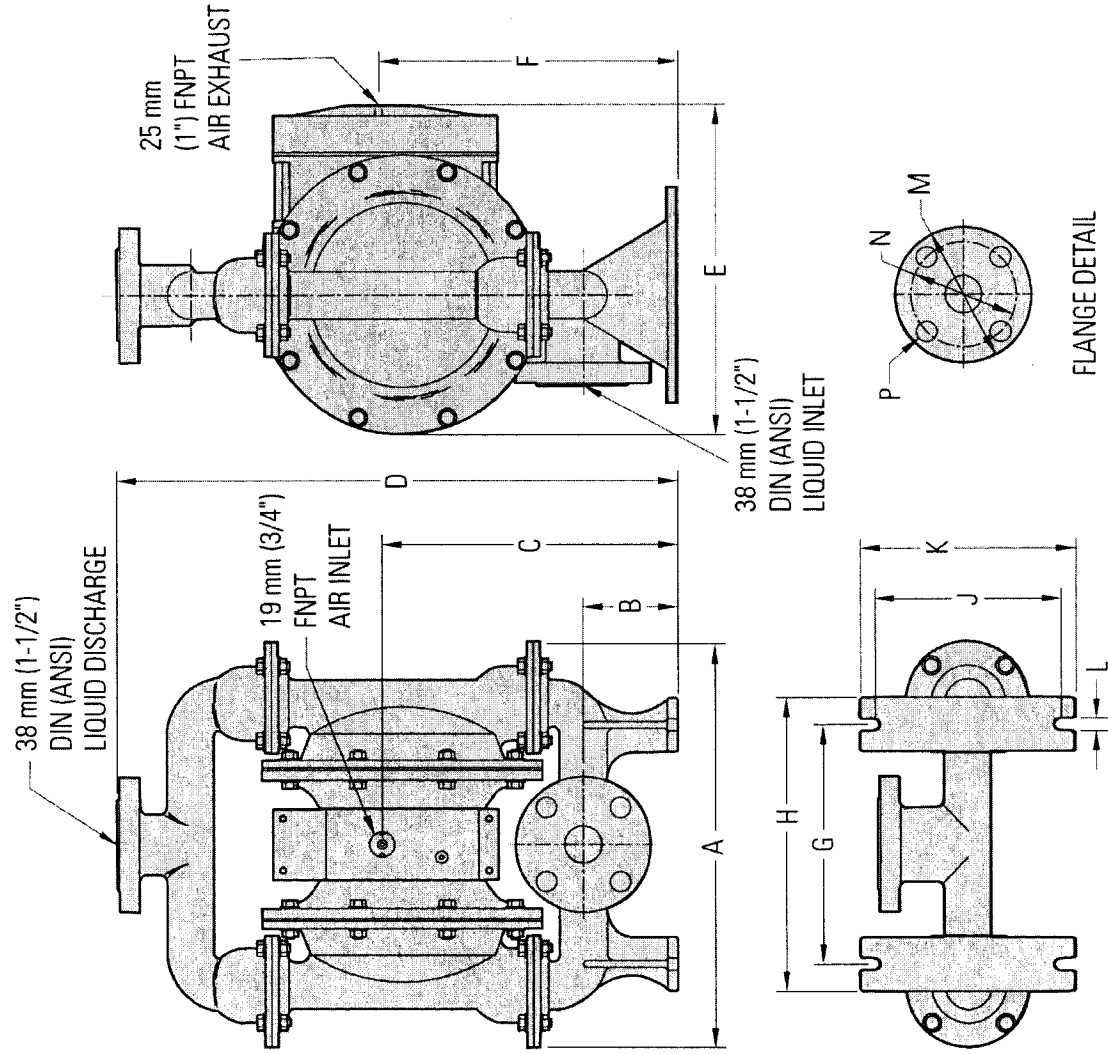

DIMENSIONS

ITEM	METRIC (mm)	STANDARD (inch)
A	384	15.1
B	89	3.5
C	277	10.9
D	528	20.8
E	310	12.2
F	279	11.0
G	224	8.8
H	274	10.8
J	178	7.0
K	203	8.0
L	10	0.4
	DIN (mm)	ANSI (inch)
M	150 DIA.	5.0 DIA.
N	110 DIA.	3.8 DIA.
P	18 DIA.	0.6 DIA.

TECHNIQUES DES FLUIDES

10 Rue Jean Poulmarch, bat. 3
Z.I. Du Val d'Argent
95100 Argenteuil
Tel. : 01.34.11.13.73 / Fax : 01.34.11.96.35

E-mail : tdf@techniquesfluides.fr
Site web : www.techniquesfluides.fr



PV400 STAINLESS STEEL TEFLON®-FITTED


Height 528 mm (20.8")
Width 384 mm (15.1")
Depth 310 mm (12.2")
Ship Weight
 316 Stainless Steel 43 kg (94 lbs.)
 Alloy C 45 kg (100 lbs.)
Air Inlet 19 mm (3/4")
Inlet 38 mm (1-1/2")
Outlet 38 mm (1-1/2")
Suction Lift 4.7 m Dry (15.3')
 9.5 m Wet (31.2')
Displacement/Stroke.... 1.67 L (0.44 gal.)¹
Max. Flow Rate 299 lpm (79 gpm)
Max. Size Solids 4.8 mm (3/16")

¹Displacement per stroke was calculated at 4.8 bar (70 psig) air inlet pressure against a 2.1 bar (30 psig) head pressure.

Example: To pump 64 lpm (17 gpm) against a discharge pressure head of 2.1 bar (30 psig) requires 2.8 bar (40 psig) and 34 Nm³/h (20 scfm) air consumption.

Caution: Do not exceed 8.6 bar (125 psig) air supply pressure.

PROFLOV™

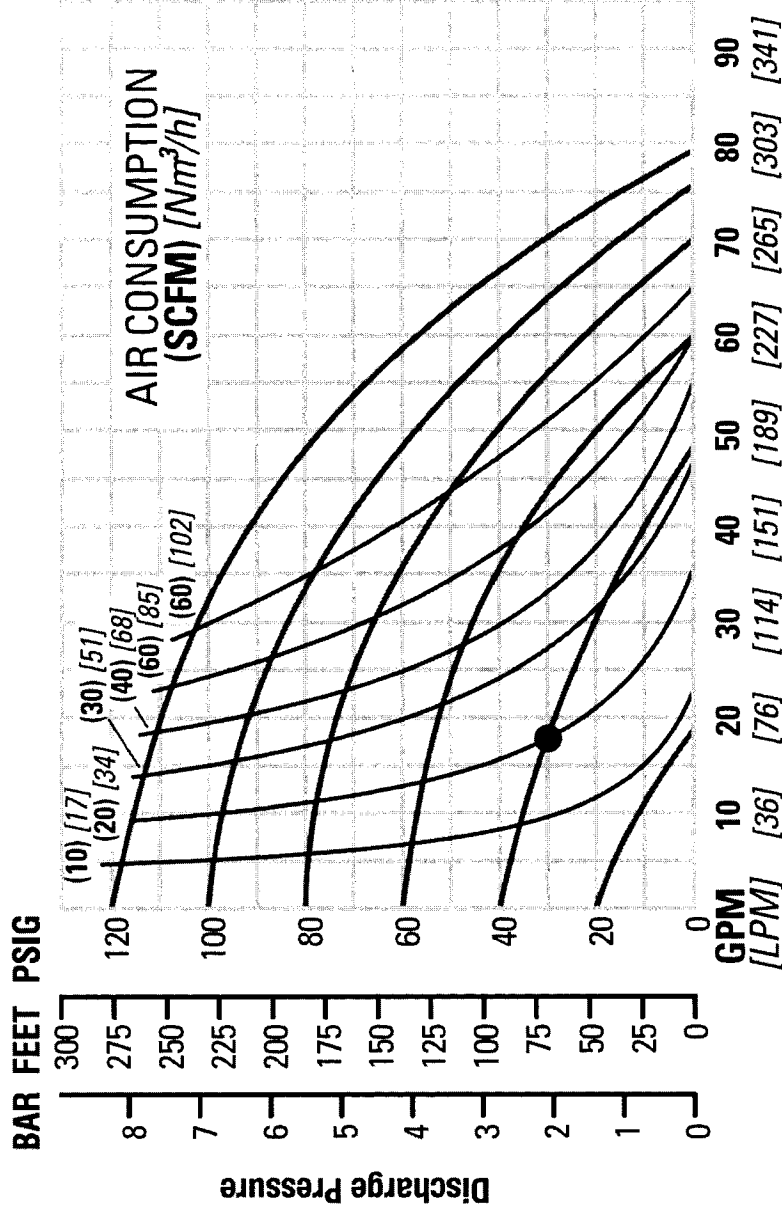

Water Discharge Flow Rates

Flow rates indicated on chart were determined by pumping water.

For optimum life and performance, pumps should be specified so that daily operation parameters will fall in the center of the pump performance curve.

TECHNIQUES DES FLUIDES

10 Rue Jean Poulmarch, bat. 3
 Z.I. Du Val d'Argent
 95100 Argenteuil
 Tel. : 01.34.11.13.73 / Fax : 01.34.11.96.35

E-mail : tdf@techniquesfluides.fr
 Site web : www.techniquesfluides.fr



PV400 STAINLESS STEEL RUBBER-FITTED


Height..... 528 mm (20.8")
 Width..... 384 mm (15.1")
 Depth..... 310 mm (12.2")
 Ship Weight
 316 Stainless Steel 43 kg (94 lbs.)
 Alloy C 45 kg (100 lbs.)
 Air Inlet..... 19 mm (3/4")
 Inlet..... 38 mm (1-1/2")
 Outlet..... 38 mm (1-1/2")
 Suction Lift 7.3 m Dry (23.8')
 9.5 m Wet (31.2')
 Displacement/Stroke.... 2.99 L (0.79 gal.)¹
 Max. Flow Rate..... 333 lpm (88 gpm)
 Max. Size Solids..... 4.8 mm (3/16")

¹Displacement per stroke was calculated at 4.8 bar (70 psig) air inlet pressure against a 2.1 bar (30 psig) head pressure.

Example: To pump 117 lpm (31 gpm) against a discharge pressure head of 5.5 bar (80 psig) requires 6.7 bar (100 psig) and 68 Nm³/h (40 scfm) air consumption.

Caution: Do not exceed 8.6 bar (125 psig) air supply pressure.

PROFLOV™

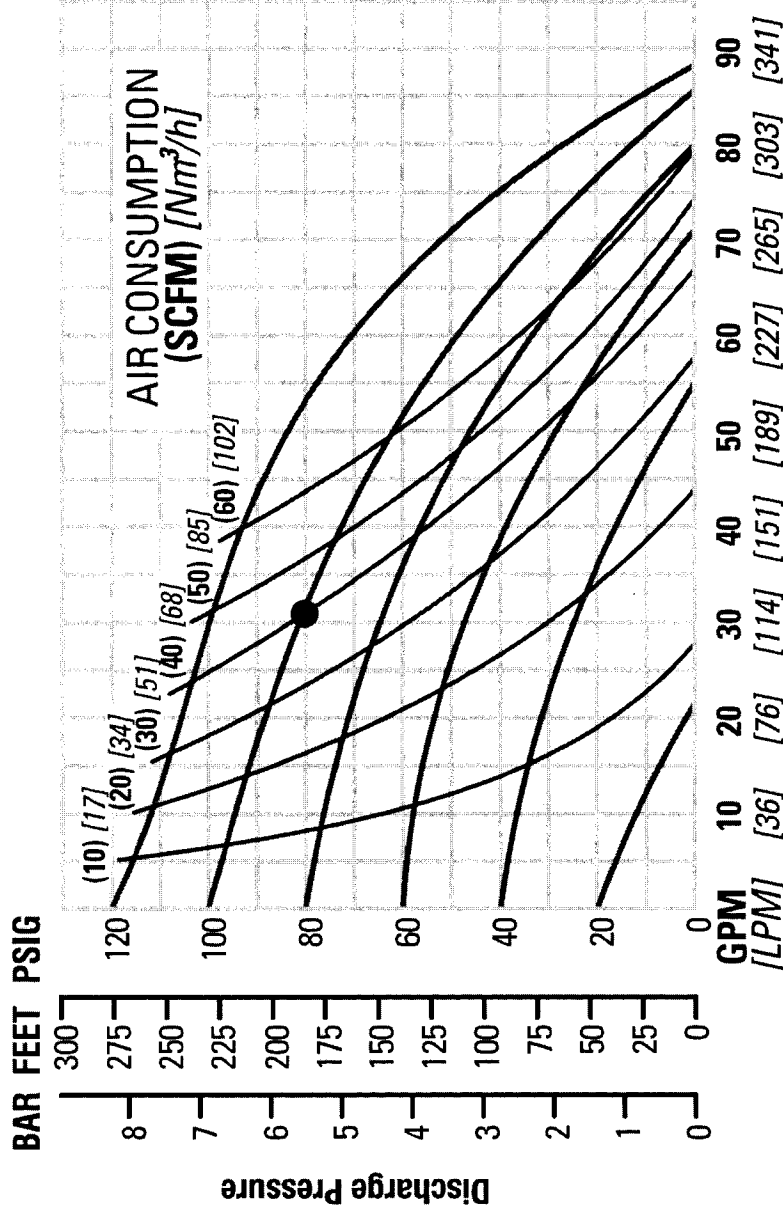

Flow rates indicated on chart were determined by pumping water.

For optimum life and performance, pumps should be specified so that daily operation parameters will fall in the center of the pump performance curve.

TECHNIQUES DES FLUIDES

10 Rue Jean Pouimarch, bat. 3

Z.I. Du Val d'Argent

95100 Argenteuil

Tel. : 01.34.11.13.73 / Fax : 01.34.11.96.35

E-mail : tdf@techniquesfluides.fr

Site web : www.techniquesfluides.fr



PV400 STAINLESS STEEL TPE-FITTED


Height	528 mm (20.8")
Width	384 mm (15.1")
Depth	310 mm (12.2")
Ship Weight	
	316 Stainless Steel 43 kg (94 lbs.)
	Alloy C 45 kg (100 lbs.)
Air Inlet	19 mm (3/4")
Inlet	38 mm (1-1/2")
Outlet	38 mm (1-1/2")
Suction Lift	6.4 m Dry (21.0')
	9.5 m Wet (31.2')
Displacement/Stroke	2.95 L (0.78 gal.) ¹
Max. Flow Rate	337 lpm (89 gpm)
Max. Size Solids	4.8 mm (3/16")

¹Displacement per stroke was calculated at 4.8 bar (70 psig) air inlet pressure against a 2.1 bar (30 psig) head pressure.

Example: To pump 91 lpm (24 gpm) against a discharge pressure head of 3.4 bar (50 psig) requires 4.1 bar (60 psig) and 34 Nm³/h (20 scfm) air consumption.

Caution: Do not exceed 8.6 bar (125 psig) air supply pressure.

PROFLO V™

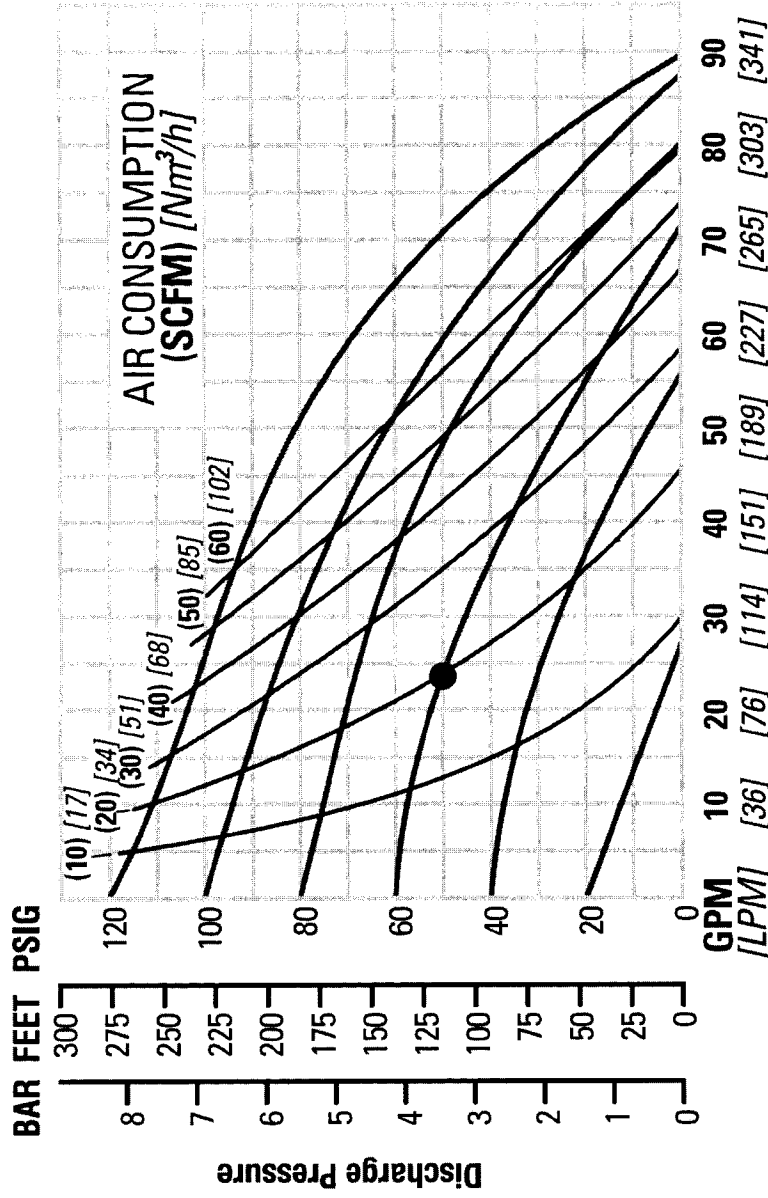

Water Discharge Flow Rates

Flow rates indicated on chart were determined by pumping water.

For optimum life and performance, pumps should be specified so that daily operation parameters will fall in the center of the pump performance curve.

TECHNIQUES DES FLUIDES

10 Rue Jean Poulmarch, bat. 3

Z.I. Du Val d'Argent

95100 Argenteuil

Tel. : 01.34.11.13.73 / Fax : 01.34.11.96.35

E-mail : tdf@techniquesfluides.fr

Site web : www.techniquesfluides.fr



PV400 STAINLESS STEEL ULTRA-FLEX™-FITTED


Height	528 mm (20.8")
Width	384 mm (15.1")
Depth	310 mm (12.2")
Ship Weight	
	316 Stainless Steel 43 kg (94 lbs.)
	Alloy C 45 kg (100 lbs.)
Air Inlet	19 mm (3/4")
Inlet	38 mm (1-1/2")
Outlet	38 mm (1-1/2")
Suction Lift	6.3 m Dry (20.5') 9.5 m Wet (31.2')
Displacement/Stroke	2.12 L (0.56 gal.) ¹
Max. Flow Rate	303 lpm (80 gpm)
Max. Size Solids	4.8 mm (3/16")

¹Displacement per stroke was calculated at 4.8 bar (70 psig) air inlet pressure against a 2.1 bar (30 psig) head pressure.

Example: To pump 121 lpm (32 gpm) against a discharge pressure head of 4.1 bar (60 psig) requires 2.8 bar (40 psig) and 68 Nm³/h (40 scfm) air consumption.

Caution: Do not exceed 8.6 bar (125 psig) air supply pressure.

PROFLOV™

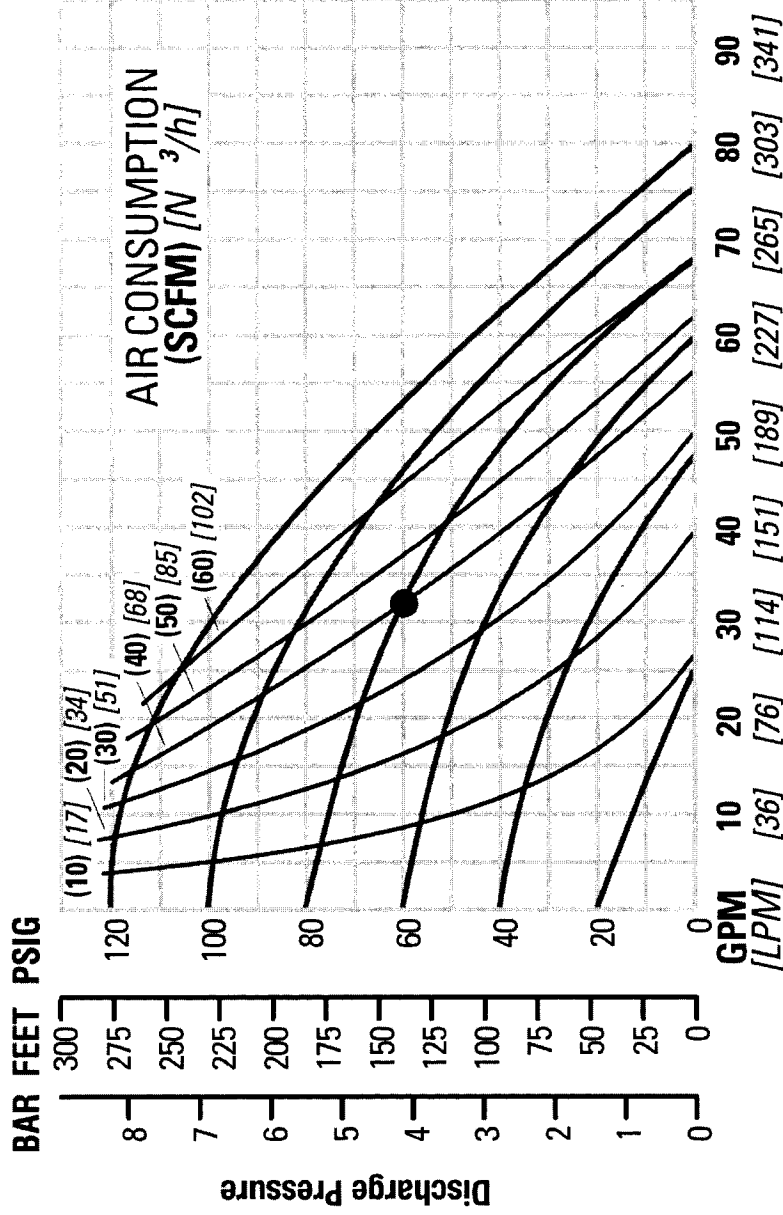

Water Discharge Flow Rates

Flow rates indicated on chart were determined by pumping water.

For optimum life and performance, pumps should be specified so that daily operation parameters will fall in the center of the pump performance curve.