


TECHNIQUES DES FLUIDES

10 Rue Jean Poulmarch, bat. 3
 Z.I. Du Val d'Argent
 95100 Argenteuil
 Tel. : 01.34.11.13.73 / Fax : 01.34.11.96.35

E-mail : tdf@techniquesfluides.fr
 Site web : www.techniquesfluides.fr




WILDEN MODEL T8 METAL STALLION

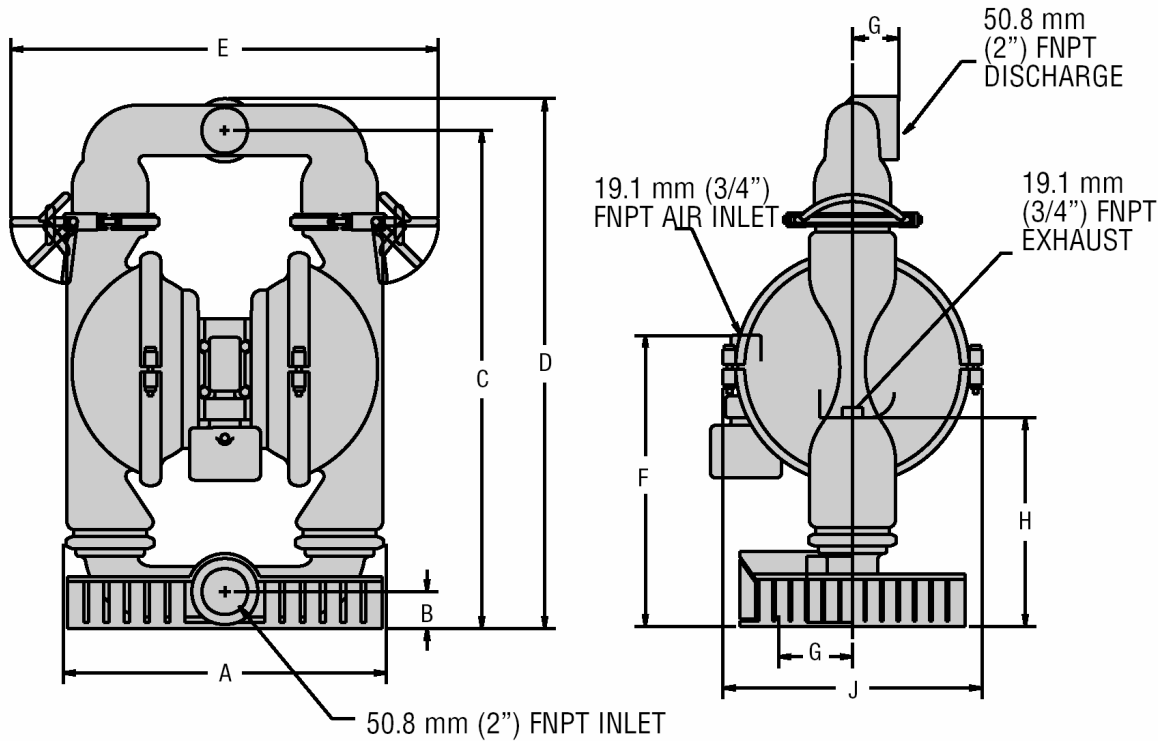

DIMENSIONS – T8 (STALLION)		
ITEM	METRIC (mm)	STANDARD (inch)
A	409.6	16.12
B	44.5	1.75
C	625.5	24.62
D	665.2	26.18
E	609.6	24
F	374.1	14.75
G	61.7	2.43
H	263.5	10.37
J	346.1	13.62
K	282.6	11.12
L	279.4	11
M	Ø14.3	Ø.56

1. Available in BSP threads.

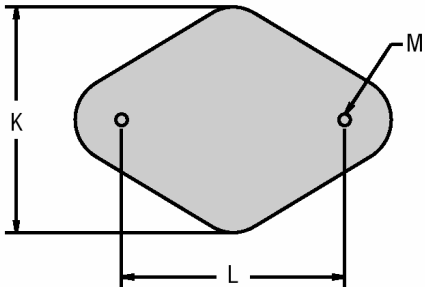

TECHNIQUES DES FLUIDES

10 Rue Jean Poulmarch, bat. 3

Z.I. Du Val d'Argent

95100 Argenteuil

Tel. : 01.34.11.13.73 / Fax : 01.34.11.96.35

E-mail : tdf@techniquesfluides.fr

Site web : www.techniquesfluides.fr



MODEL T8 METAL STALLION ULTRA-FLEX™-FITTED

Height.....669.2 cm (26¹¹/₃₂"

Width.....404.0 cm (15²⁹/₃₂"

Depth.....254.0 cm (10"

Ship Weight.....Aluminum 33.1 kg (72 lbs.)

Cast Iron 52.4 kg (114 lbs.)

316 Stainless Steel 48.8 kg (106 lbs.)

Hastelloy 53.4 kg (116 lbs.)

Air Inlet19.1 mm (¾"

Inlet.....5.08 cm (2"

Outlet.....5.08 cm (2"

Suction Lift3.35 m Dry (11'

9.45 m Wet (31')

Displacement per

Stroke 1.67 l (0.44 gal.)¹

Max. Flow Rate.....567.81 lpm (150 gpm)

Max. Size Solids.....1.91 cm (¾"


¹Displacement per stroke was calculated at 4.8

Bar (70 psig) air inlet pressure against a 2 Bar

(30 psig) head pressure.

Example: To pump 322 lpm (85 gpm) against a discharge pressure head of 2.1 Bar (30 psig) requires 4.1 Bar (60 psig) and 110.5 Nm³/h (65 scfm) air consumption. (See dot on chart.)

Caution: Do not exceed 8.6 Bar (125 psig) air supply pressure.

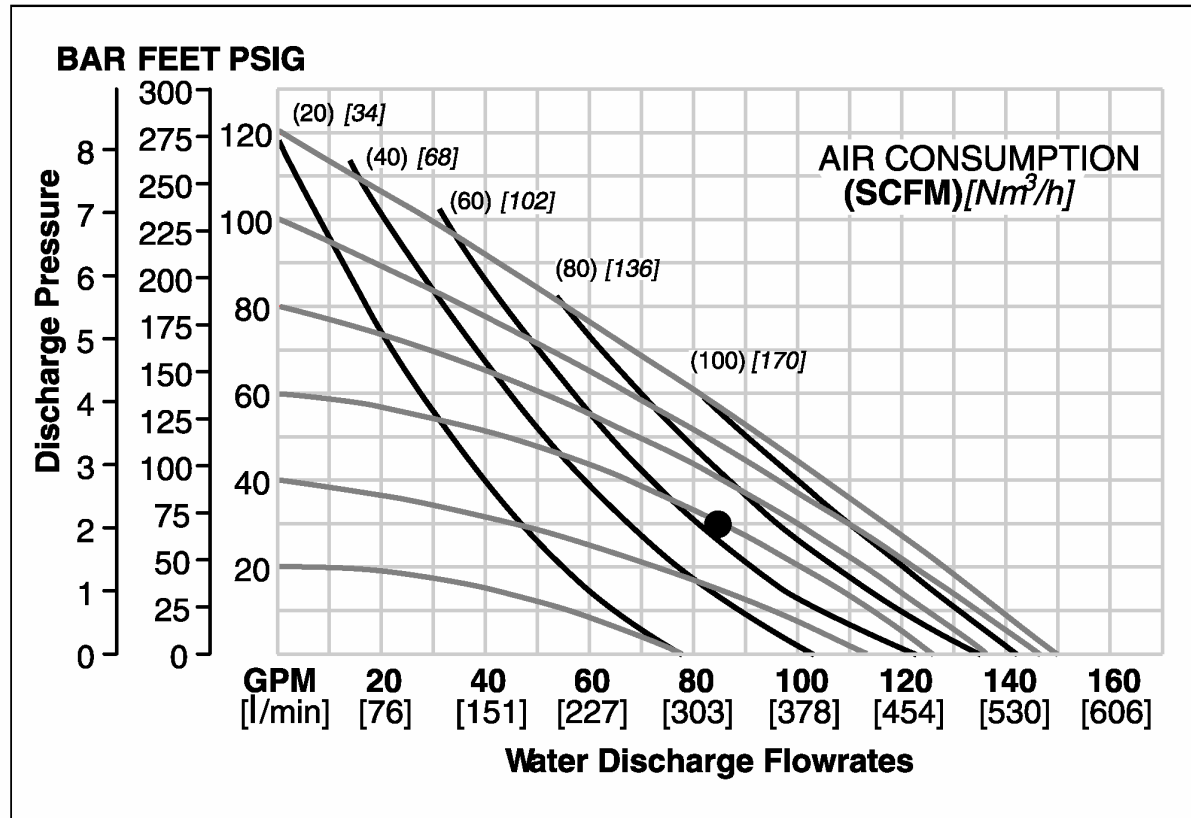

Flow rates indicated on chart were determined by pumping water.

For optimum life and performance, pumps should be specified so that daily operation parameters will fall in the center of the pump performance curve.

TECHNIQUES DES FLUIDES

10 Rue Jean Poulmarch, bat. 3

Z.I. Du Val d'Argent

95100 Argenteuil

Tel. : 01.34.11.13.73 / Fax : 01.34.11.96.35

E-mail : tdf@techniquesfluides.fr

Site web : www.techniquesfluides.fr



MODEL T8 METAL STALLION TPE-FITTED


Height.....669.2 cm (26¹/₃₂"")
 Width.....404.0 cm (15²⁹/₃₂"")
 Depth.....254.0 cm (10")
 Ship Weight.....Aluminum 33.1 kg (72 lbs.)
 Cast Iron 52.4 kg (114 lbs.)
 316 Stainless Steel 48.8 kg (106 lbs.)
 Hastelloy 53.4 kg (116 lbs.)
 Air Inlet19.1 mm (¾")
 Inlet.....5.08 cm (2")
 Outlet5.08 cm (2")
 Suction Lift3.35 m Dry (7')
 9.45 m Wet (28')

Displacement per
 Stroke 1.89 l (0.5 gal.)¹
 Max. Flow Rate.....605.67 lpm (160 gpm)
 Max. Size Solids.....1.91 cm (¾")

¹Displacement per stroke was calculated at 4.8 Bar (70 psig) air inlet pressure against a 2 Bar (30 psig) head pressure.

Example: To pump 322 lpm (85 gpm) against a discharge pressure head of 2.1 Bar (30 psig) requires 4.1 Bar (60 psig) and 94 Nm³/h (55 scfm) air consumption. (See dot on chart.)

Caution: Do not exceed 8.6 Bar (125 psig) air supply pressure.

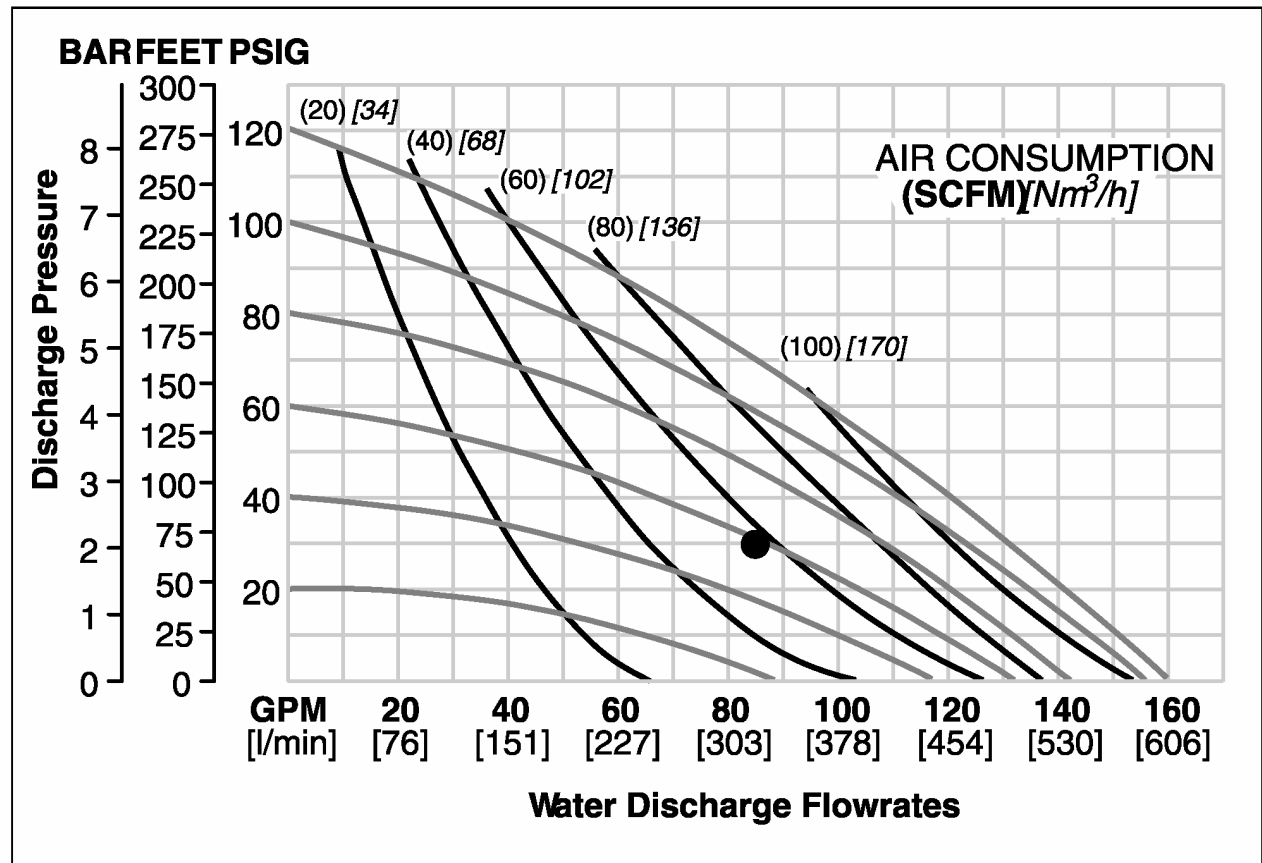

Flow rates indicated on chart were determined by pumping water.

For optimum life and performance, pumps should be specified so that daily operation parameters will fall in the center of the pump performance curve.